



NAPCO SECURITY TECHNOLOGIES, INC.
333 Bayview Avenue, Amityville, New York, U.S.A. 11701
800-645-9445 (631) 842-9400 FAX (631) 842-9137
Note: Technical Service is for alarm professionals only

NAPCO Tech Support

TECH NOTE




Date: Friday, October 06, 2023

Subject: FireLink GEMC NAC Extender Wheelock / EATON LED Strobe Compatibility

Models: FireLink GEMC-NAC7S Extender

The **GEMC-NAC7S** extender supports Wheelock / EATON LED strobe lights (series ELHSC) for outputs NAC 1 and NAC 2 only. Outputs NAC 3 and NAC 4 do not currently support Wheelock strobes. If connected to NAC 3 or NAC 4, the LED strobes will cycle once and turn off within 30 seconds during an alarm condition. NAC 1 and NAC 2 connections can be synchronized by INPUT 1 from the main control panel.

The current **GEMC-NAC7S** model is identified with firmware version 82.0 (as seen on the PCB stickers below). Future firmware enhancements will support Wheelock LED strobes on NAC 3 and NAC 4 outputs.

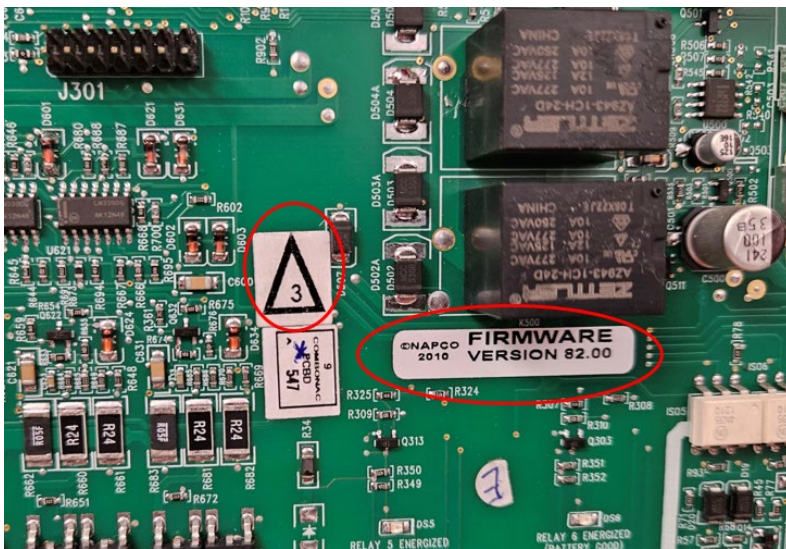

The Wheelock / EATON LED strobes have been verified to be working when connected to the four NAC outputs of the GEMC control panel.

Solution: Connect Wheelock / EATON LED strobe lights to NAC 1 and NAC 2 on the **GEMC-NAC7S**.